


Aluminium ANODE K-A25

gross weight: 2,50 kg
nett weight: 2,10 kg

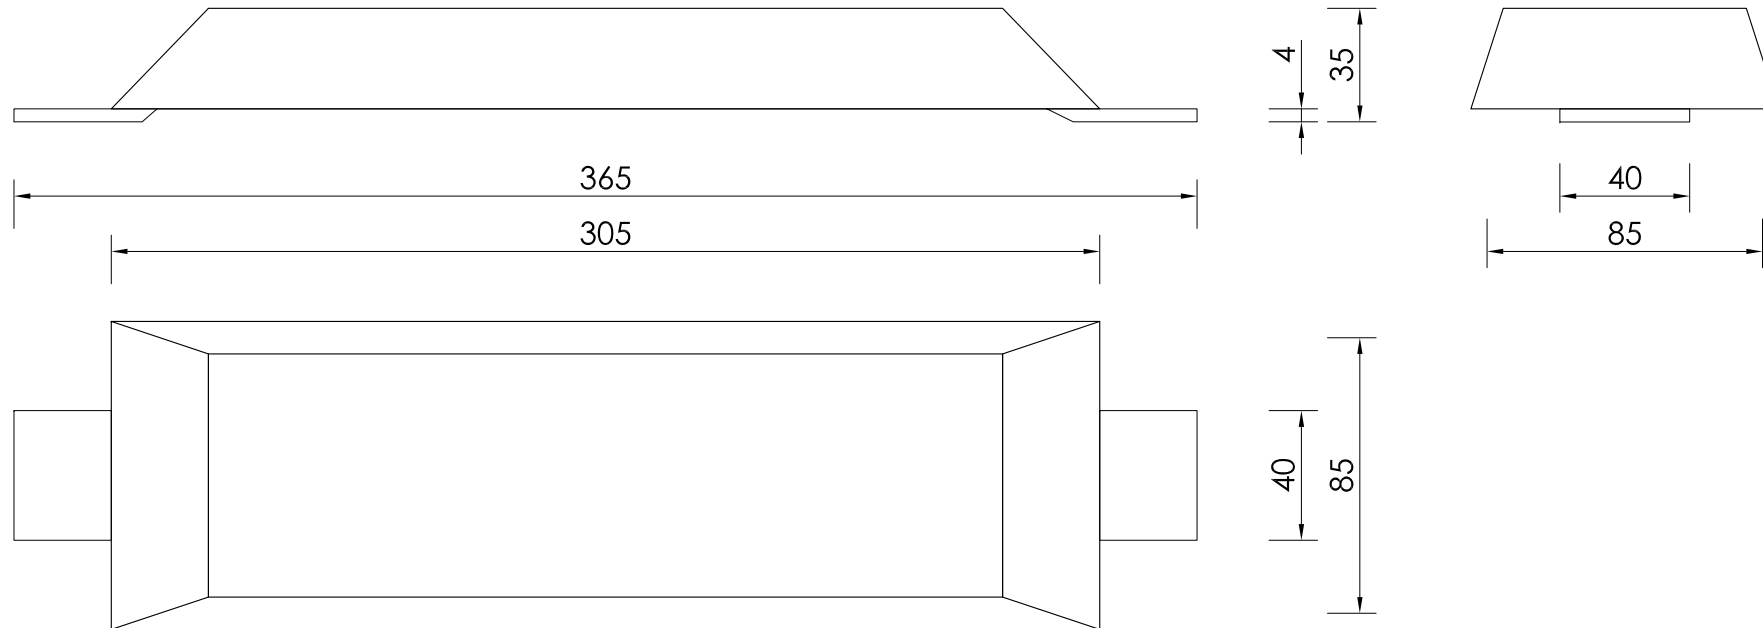

Technical specification AlZnIn - alloy type A2 according to EN12496:2013 :

Alloying elements:		Impurities:	
Zn [%]:	3,0 - 5,5	Fe [%]:	max 0,09
In [%]:	0,016 - 0,040	Cu [%]:	max 0,005
Al -	balance	Si [%]:	max 0,10

Electrochemical efficiency min: 2500 Ah/kg
according to DNV RP B401 test appendix B

Note:

- All weights and dimensions are nominal.
- Dimensions in mm

 MAKROMOR CATHODIC PROTECTION	MAKROMOR SP. Z O.O. Ul. Gołębia 15 81-185 Gdynia, POLAND Phone: +48 58 661-57-99 Fax: +48 58 661-01-89 e-mail: biuro@makromor.pl website: www.makromor.pl		Scale:	1:2,5
	Type: ALUMINIUM HULL ANODE K-A25		Insert type:	S235JR
Product code: A25/K/85/35/305/365/0		Alloy:	AlZnIn	
Drawer: Ewa Nawrocka		Date: 15-04-2013	Approved: Grzegorz Pryłowski	Alternative type:
Date: 15-04-2013		Drawing No.:		AKA25/0
Date: 16-04-2013		Copyright MAKROMOR SP. Z O.O. All rights reserved.		