


# Aluminium ANODE K-A25/1

gross weight: 2,50 kg  
nett weight: 2,20 kg

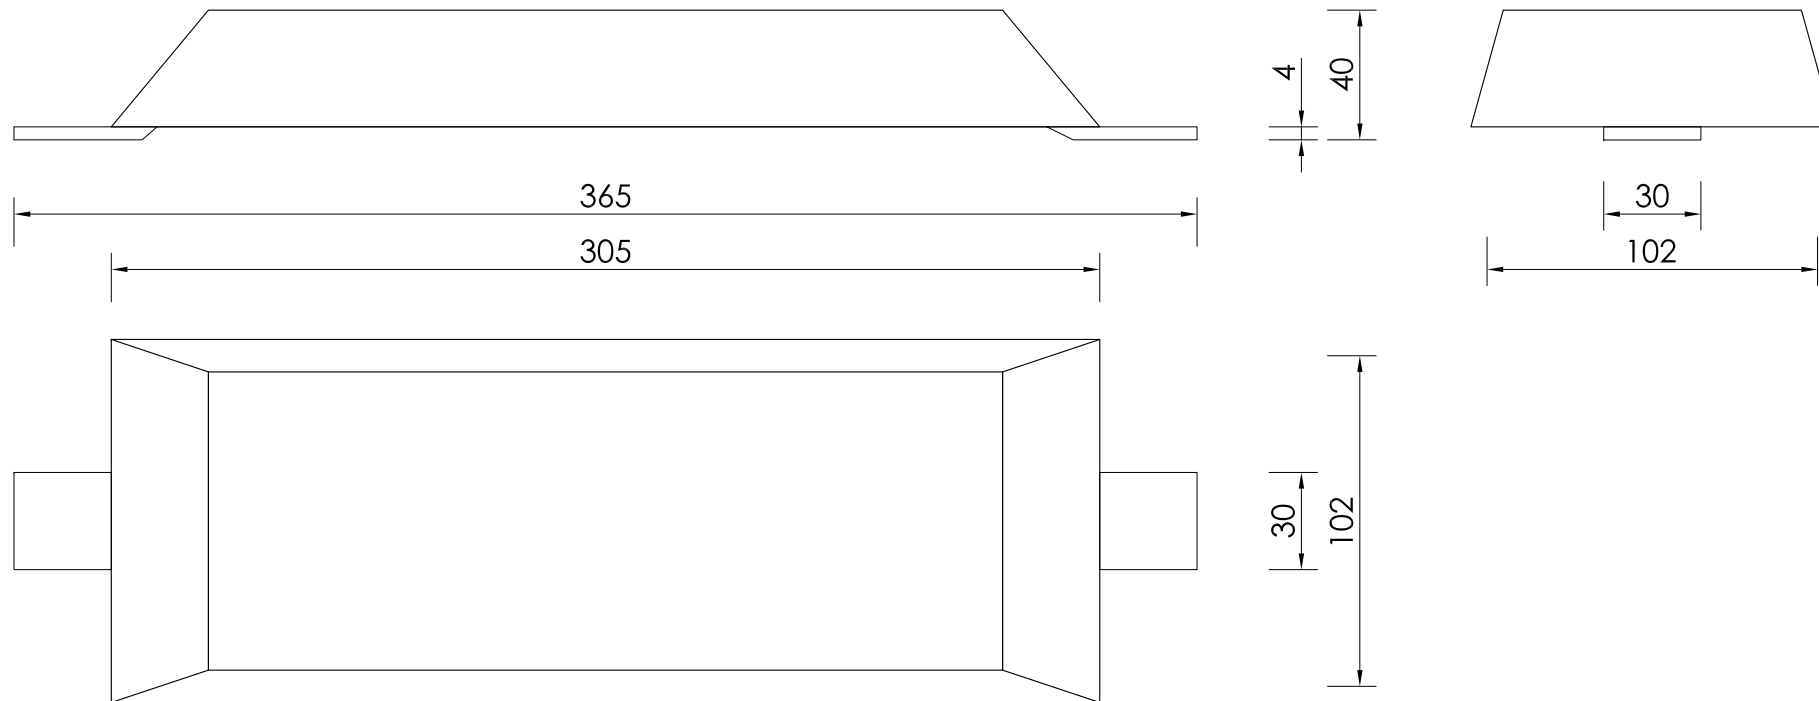

Technical specification AlZnIn - alloy type A2 according to EN12496:2013 :

Alloying elements:		Impurities:	
Zn [%]:	3,0 - 5,5	Fe [%]:	max 0,09
In [%]:	0,016 - 0,040	Cu [%]:	max 0,005
Al -	balance	Si [%]:	max 0,10

Electrochemical efficiency min: 2500 Ah/kg  
according to DNV RP B401 test appendix B

Note:

- All weights and dimensions are nominal.
- Dimensions in mm

 <b>MAKROMOR</b> CATHODIC PROTECTION	MAKROMOR SP. Z O.O. Ul. Gołębia 15 81-185 Gdynia, POLAND Phone: +48 58 661-57-99 Fax: +48 58 661-01-89 e-mail: biuro@makromor.pl website: www.makromor.pl	Scale:	<b>1:2,5</b>
		Insert type:	<b>S235JR</b>
		Alloy:	<b>AlZnIn</b>
Type:	<b>ALUMINIUM HULL ANODE K-A25/1</b>	Alternative type:	
Product code:	<b>A25/K/102/40/305/365/1</b>	Drawing No.:	<b>AKA25/1</b>
Drawer:	Ewa Nawrocka	Date:	15-04-2013
Approved:	Grzegorz Pryłowski	Date:	16-04-2013
Copyright MAKROMOR SP. Z O.O. All rights reserved.			