


Aluminium ANODE K4-3

gross weight: 6,20 kg
 nett weight: 5,20 kg

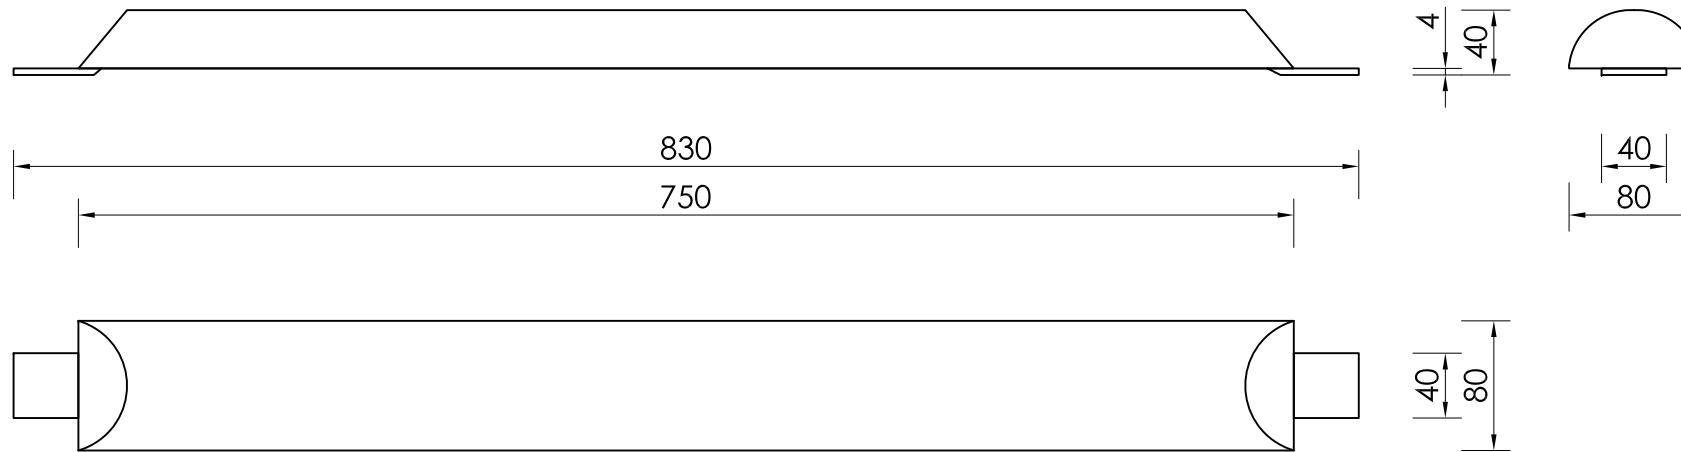

Technical specification AlZnIn - alloy type A2 according to EN12496:2013 :

Alloying elements:		Impurities:	
Zn [%]:	3,0 - 5,5	Fe [%]:	max 0,09
In [%]:	0,016 - 0,040	Cu [%]:	max 0,005
Al -	balance	Si [%]:	max 0,10

Electrochemical efficiency min: 2500 Ah/kg
 according to DNV RP B401 test appendix B

Note:

- All weights and dimensions are nominal.
- Dimensions in mm

 MAKROMOR CATHODIC PROTECTION	MAKROMOR SP. Z O.O. Ul. Gołębia 15 81-185 Gdynia, POLAND Phone: +48 58 661-57-99 Fax: +48 58 661-01-89 e-mail: biuro@makromor.pl website: www.makromor.pl	Scale:	1:5
		Insert type:	S235JR
Type: ALUMINIUM HULL ANODE K4-3		Alloy:	AlZnIn
Product code: A62/K4/80/40/750/830/0		Alternative type:	
Drawing No.:		AK43/0	
Drawer: Ewa Nawrocka	Date: 16-04-2013	Approved: Grzegorz Pryłowski	Date: 17-04-2013
Copyright MAKROMOR SP. Z O.O. All rights reserved.			